

## Standard Model Digital Force Gauge ZTS series

Feature 1 Clear display / Easy setting.

Feature 2 You can capture peak value precisely due to high sampling.

Feature 3 Easy data management on PC with included software, ZT-Logger.

Feature 4 Various functions to improve usability in different environment.




Included Software ZT-Logger

### Feature 1 Clear display / Easy setting

- Clear organic display has excellent readability and reduces misreading.

- Setting menu with multiple languages helps easy operation.

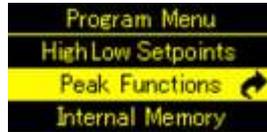



\*Higher range of 2500N is different in shape

### Feature 2 You can capture peak value precisely at high sampling.

It reduces missing load value due to high sampling speed (2000 data / sec.). Peak value can be accurately captured.

Breaking tests of the same sample



Sampling speed: 2000Hz  
->High repeatability

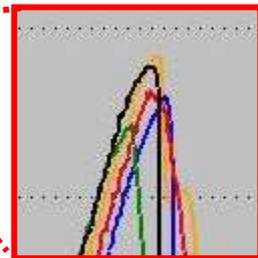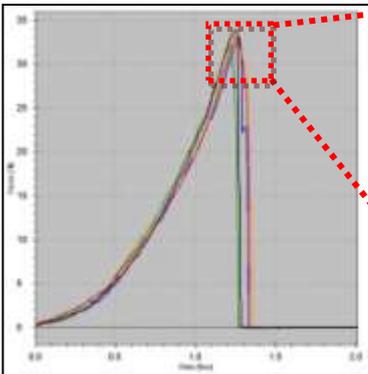

Data measured at 2000Hz

Ave. of peak : 33.2N  
Nearly the same value

Sampling speed: 100Hz  
->Dispersion of the measured data

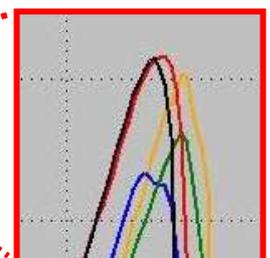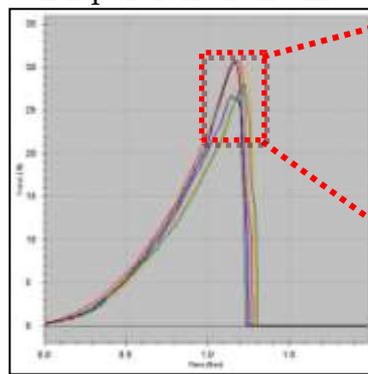

Data measured at 100Hz

Ave. of peak: 29.92N  
Values vary. Ave. is lower.

\*Depending on sample or testing conditions, you may not get the same result.

With optional software, Force Recorder, you can make graphs of force versus time.

For further information, go to "Related products" on page 5

### How to use

Simply handheld use



High repeatability with a test stand



Make graphs to analyze force transition



Press peak button once, so that it holds peak value.


**Feature 3 Easy and reliable data management on PC with included software, ZT-Logger.**

Included data logger software, ZT-Logger can transfer data to PC by one click all at once.

- Displayed value at when you press SEND button
- Continuous data (10 data / sec)  
(You can make a graph with Excel later)
- Data saved in internal memory

Merits to Use


- You can connect ZTS to PC via USB, easy setup.
- Date and time are automatically recorded when you transfer data. Data query in the future is easy.
- Maximum / minimum value, OK/NG judgment (+NG / -NG) are colored, so that you can clearly understand the test result.

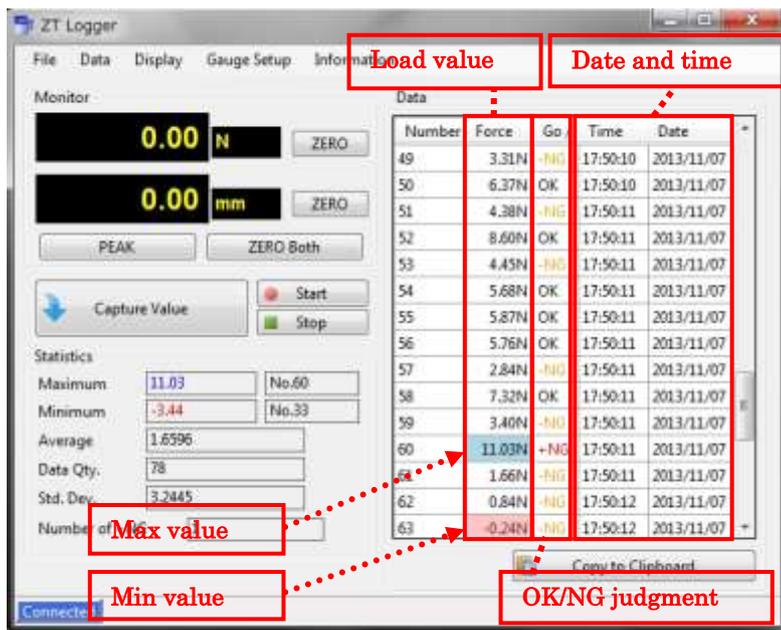

With optional software, Force Recorder, you can make graphs of force versus time. For further information, go to "Related products" on page 5

**Feature 4 Various functions to improve usability in different measurement environment**

Bar graph of force

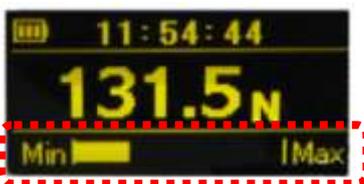

Force transition is clearly visible.

You can clearly see force transition, which is useful for overload (sensor break-down) prevention. \*1

Overload (sensor break-down) warning \*1



When load over its capacity is added, warning is indicated. Please stops measurement immediately when this indication show up.

Internal memory



Peak values can be saved in ZTS itself.

1000 data at maximum can be saved, and you can see the data on its display.

OK/NG judgment



LED light shows its judgment.

Alarm goes off when it detects +NG

You can set high/low points, and LED light tells you if measured value is between high and low points or not. Signal output is also possible and you can synchronize it with external equipment.

**When you connect ZTS to a motorized test stand (External equipment) with a dedicated cable, more useful functions can be activated:**

- For example...
- Avoiding overload (sensor break-down) \*2
  - Operation control according to selected load values.

\*1 It does NOT completely prevent overload. It may be overloaded before the warning indication shows up in the case when high load is added in a moment.

\*2 A motorized test stand and a dedicated cable are necessary to activate this function. We cannot assure the perfect prevention against overload (sensor break-down).

**[Specifications of ZT series]**

Model	ZTS
Feature	Standard model with high functionality and usability.
Accuracy	+/-0.2%F.S.+/-1digit
Unit of measurement(*1)	N, kgf, lbf (*2)
Display	4-digit Organic EL
Display update	10 / sec
Sampling rate	2000 data / sec at maximum
Battery	8 hours (8 hours charge)
Safe overload rating	Approx.200%F.S.
Operating environment	Temperature: 0 to +40 degree Celsius, Humidity: 20 to 80%RH
Function	Customized display (header and footer), Peak hold (tension and compression), Internal 1000 points data memory, Comparator (judgment of OK or NG), Reversible display, Sign inversion, Zero clear timer, +NG alarm, Off timer (auto power off), Dumping, Time display
Output	USB, RS232C, Mitutoyo digimatic (*3), 2 VDC analog output (D/A), Comparator 3 steps (-NG/OK/+NG), Overload alarm
Overload warning	Approx.110%F.S. (Warning message and alarm )
External connecting switch	SEND (a point of contact holding), Zero reset, Peak ON/OFF setting
Weight	From 2N to 1000N model: Approx.490g (*4) 2500N, 5000N: Approx.1100g (*4)
Dimensions	Please refer to dimensions.
Accessory	AC adapter, Inspection certificate, CD driver (including simple software for data logging), Attachments (The set of attachments varies according to range.), USB cable, Carrying case.

\*1 These are the specifications for International model. Please note that this unit is different from Japanese domestic model and international one.

\*2 [N indication] The indication of 2N and 5N models is mN or N. The indication of 1000N,2500N and 5000N model is N or kN.

[kgf indication] The indication of 2N and 5N models is gf.

[lbf indication] The indication of 2N and 5N models is ozf.

\*3 Not always available for Mitutoyo digimatic products.

\*4 Weight is slightly different according to range.

**[ZT series models]**

Model	Capacity	Display	Resolution	Thread	Included attachment
ZTS-2N	2N	2.000N (2000mN)	0.001N (1mN)	M6	A1 to A8
ZTS-5N	5N	5.000N (5000mN)	0.001N (1mN)		
ZTS-20N	20N	20.00N	0.01N		
ZTS-50N	50N	50.00N	0.01N		
ZTS-100N	100N	100.0N	0.1N		S1 to S8
ZTS-200N	200N	200.0N	0.1N		
ZTS-500N	500N	500.0N	0.1N		
ZTS-1000N	1000N	1000N (1.000kN)	1N (0.001kN)	M10	RS1, S2 to S8
ZTS-2500N	2500N	2500N (2.500kN)	1N (0.001kN)		
ZTS-5000N	5000N	5000N (5.000kN)	1N (0.001kN)		

**[Included Accessories]**

<p>Data logger Simple software ZT-Logger</p>	<p><b>Main functions</b></p> <ul style="list-style-type: none"> <li>- Captures peak data (*1)</li> <li>- Captures continuous data (10 data /sec) (*1)</li> <li>- The recall of memory data (*1)</li> <li>- Saves data in CSV format</li> </ul> <p><b>Operating environment (*2)</b></p> <ul style="list-style-type: none"> <li>- OS: Windows XP/Vista/7(32bit/64bit)</li> <li>- CPU: more than 1GHz</li> <li>- Memory: more than 1GB</li> <li>- Hard disk : more than 2GB</li> <li>- .NET Framework4 later</li> </ul> <p>*1 Available data: Force / Time *2 Please note that the software may not work in all environmental combinations.</p>	
<p>Graphing software Trial version  Force Recorder Professional Trial Edition</p>	<p>◎You can try an optional graphing software for free for 30 days.</p> <p><b>Main functions</b></p> <ul style="list-style-type: none"> <li>- Force versus time graphing at 2000Hz at maximum</li> <li>- Overlaying graphs for comparing, editing functions such as comment writing.</li> </ul> <p><b>Operating environment (*1)</b></p> <ul style="list-style-type: none"> <li>- OS: Windows XP/Vista/7(32bit/64bit)</li> <li>- CPU: more than 1GHz</li> <li>- Memory: more than 2GB</li> <li>- Hard disk: more than 10GB</li> <li>- .NET Framework4 later</li> </ul> <p>* Some functions are not available in trial version. Please refer to the specifications of Force Recorder series for more details. *1 Please note that the software may not work in all environmental combinations.</p>	
<p>Attachment</p>	<p><b>Accessory attachment</b></p> <p>&gt;&gt; Please refer to ZT series Range above.</p> <p>*The set of attachments varies according to range. *For more information, please refer to Standard attachment specifications.</p>	<p>Accessory attachments' shape. (an excerpt)</p>  <p>S-1 Small hook      S-2 Disk shaped      S-3 Conical shaped      S-6 Extension rod      S-7 Large hook</p>

**[Option]**

Option	Details	Model
<p>Analog voltage (Sensor raw data)</p>	<p>To output sensor data as fast analog voltage without conversion. *The speed is higher than D/A (standard), but there are demerits at the same time that zero reset is not possible, and there are may be signal noise. *CB-118 cable is necessary.</p>	<p>-AN</p>

\* With CB-108, you can output analog voltage from standard ZTS series.


## [Application of Force Gauge]

ZT series enable...

1. Controlling external equipment according to load value. (e.g. To stop or change operation of machine at a selected load value.)
  2. Adding a certain load value. (e.g. To maintain sample pressed at a chosen load value.)
  3. Producing inspection device synchronized with work process. (e.g. To improving efficiency of inspection process.)
  4. Finding inferior goods earlier with OK/NG judgment function.(e.g. To do quality control thoroughly)
- >> Please contact us or our distributor in your country for further information.

## [Related products]

### Graphing Software: Force Recorder

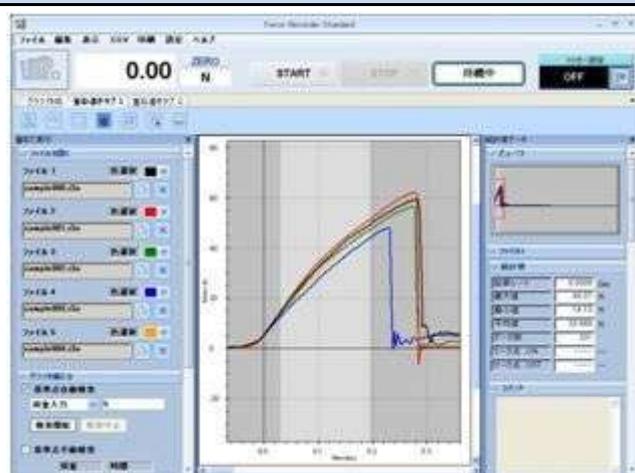

※This image is from Standard ver.

#### Main functions

- You can make graphs at real time via USB connection at 2000Hz.
  - 5 graphs at maximum can be overlaid. (Available in Standard model only)
  - You can write memo on each graph. You may write down testing conditions such as testing speed.
- \* 2 models available to suit your needs: Light, and Standard  
 \* Please refer to each specification for further information

Force gauge: ZTA series	Printer: DP-1VR	Handle: FOH-1	Battery: BP-308
			
High functionality model. It has more useful functions than ZTS series.	Prints indicated values and data in internal memory. *CB-308 cable is necessary.	You can grip handles firmly so that it becomes easier to apply high load force steadily.	Battery for replacement.

## [Related Cable]

Model	Explanation	Purpose of use
CB-108	Analog cable	To connect to a multi meter, oscilloscope.
CB-118	Analog cable (For -AN option)	To connect to a multi meter, oscilloscope.
CB-208	RS232C cable	To connect to a PC having its own system
CB-308	Digimatic cable	To connect to a printer DP-1VR
CB-508	Test stand option cable (For MX)	To connect to a test stand to enable force control or overload prevention functions.
CB-518	Test stand option cable (For MX2,EMX)	To connect to a test stand to enable force control or overload prevention functions.
CB-908	Open end connection cable	Output cable for loose wire 37 pin (Useful for connection with unique equipment.)

**[Sensor separate model]**

Force gauge application becomes wider when combined with an external sensor (load cell).

Remote sensor meets the following test application requirements.

- You need to measure in limited place.
- You need to measure the force remotely.
- You would like to use special load cell

Please refer to Sensor separate model specifications for more information.




**[Load cells that can be combined with sensor separate model force gauge]**


Model	DPU series	LM series	LMU series	Others
Feature	Shaped to fit for mounting on your external equipment easily. For both compression and tension.	A thin coin shaped load cell for compression.	Small load cell for both compression and tension.	LU series LC series WP-50N LMT-1000N PN-50N TMS series DM-2000N
Range	2N to 20kN	10N to 20kN	50N to 500N	
Accuracy	+/-0.2%F.S.	+/-1 to 2.5%F.S.	+/-1%F.S.	
Image				

\* Please refer to each specification for more information about load cell.

**[Dimensions up to 1000N]**

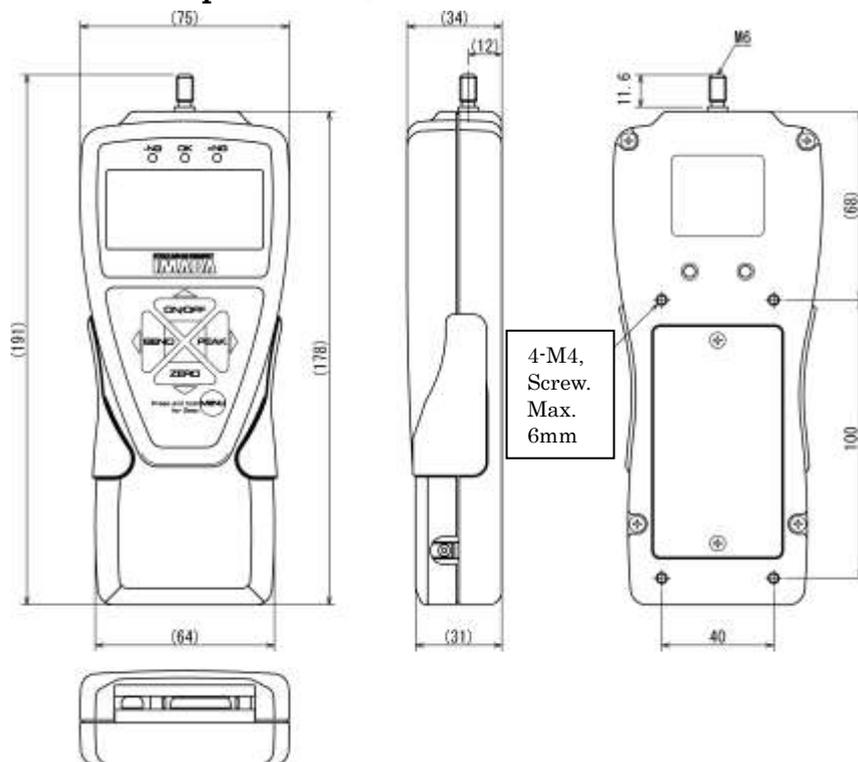

**[Dimensions from 2500N up to 5000N]**

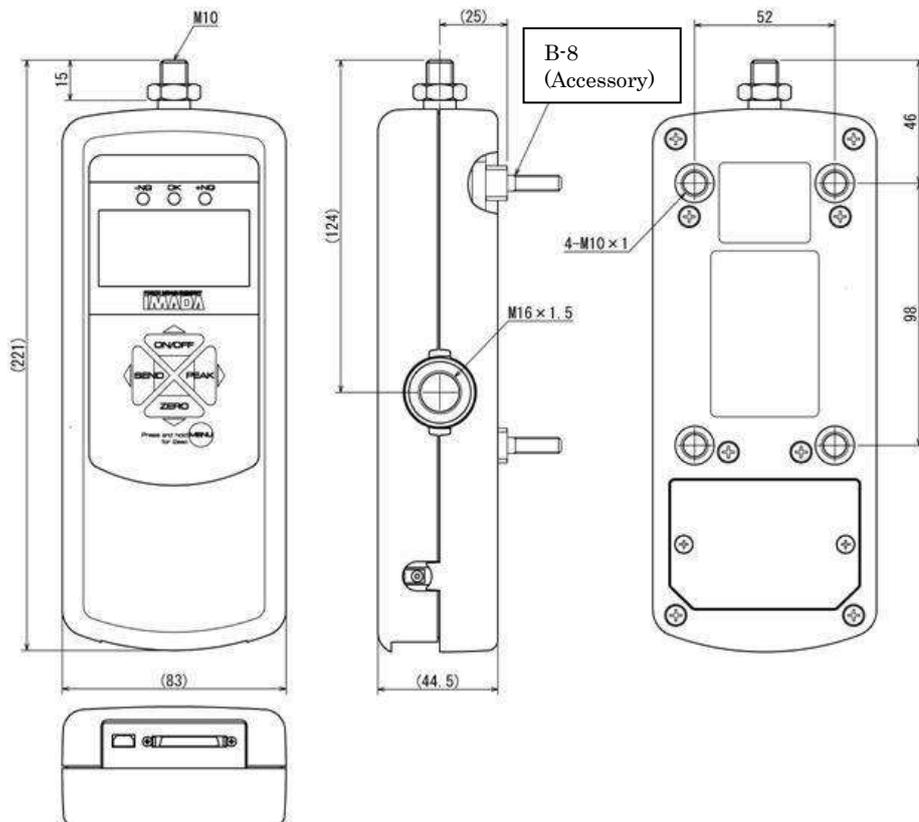

**[Calibration Certificate]**

- We offer calibration certificate with extra charge.
- We also offer calibration services according to ISO/IEC17025: 2005
- \* Please contact us or our distributor in your country for further information.

**[Cautions]**

- The contents may be changed without previous notice.
- All of products are designed for measurement purpose only.
- Do not copy and use this content without authority.
- Please note if you add load over capacity, or add force from side or torsion, its sensor would be broken down.