

CONCRETE COATINGS INSTALLER TECH KIT

TRAMEX

checkline[®]
europe

A compact kit for instant and precise moisture testing of concrete floors and slabs and ambient conditions. The Tramex CME5 moisture meter allows for non-destructive quantitative testing of concrete and comparative testing per ASTM F2659. The Ambient Feedback Datalogger is used for testing, monitoring and time logging relative humidity, temperature and dew point in the environment. The Contact Temperature Probe provides temperature readings of the floor surface. The Concrete Coatings Installer Tech Kit comes with an extension handle in a Tramex Easy-travel case. The Tramex Meters App allows you to GeoTag test results, create, save and share reports and charts, as well as see your meter screen on your phone when extending to hard to reach places.



 **TRAMEX METERS APP**
FOR IOS & ANDROID DEVICES (PHONE NOT INCLUDED WITH KIT)


Product Code: CCTK

KIT CONTENTS

1. Concrete Moisture Encounter - CME5.
2. Feedback Datalogger - DL-RHTA.
3. Free App available for Android and iOS (phone not included).
4. Contact Temperature Probe.
5. Extension Handle.



NON-DESTRUCTIVE



CONCRETE %MC
READING RANGE



CM EQUIV ANHYDRITE
READING RANGE



CM EQUIV CONCRETE
READING RANGE


ASTM
F2659



AMBIENT
RH, T, DP, g/kg



ACCOMPANYING
APP



EXTENSION HANDLE

SPECIFICATIONS

CONCRETE MOISTURE ENCOUNTER - SPECIFICATIONS & MEASURING RANGE



The Tramex Concrete Moisture Encounter 5 (CME5) is a non-destructive analog moisture meter for concrete floors and slabs providing instant and precise quantitative measurement of moisture content using Gravimetric testing as a baseline. The CME5 also provides Carbide Method equivalent readings for concrete and other cementitious substrates as well as comparative readings as per ASTM F2659.

Size:	160mm x 85mm x 38mm (6.3" x 3.5" x 1.5")	Moisture Content for Concrete	0 → 6%
Weight:	344g (12.1oz)	Carbide Method moisture content equivalent for Anhydrite	0 → 1.9
Construction:	ABS Body	Carbide Method moisture content equivalent for Concrete	0 → 4
Power:	2 x AALR6 ALKALINE (included)		
Display:	Analogue		
Depth of penetration:	approx. 20 mm (¾")		

FEEDBACK DATALOGGER - SPECIFICATIONS & MEASURING RANGE



The Feedback DataLogger and App log up to 100,000 data point entries for relative humidity, temperature, dew point and grains per pound, transmitted wirelessly via Bluetooth BLE technology to your mobile device.

Size:	100mm x 90mm x 35mm (3.94" x 3.54" x 1.38")	Memory:	100,000 data point entries (samples of Ambient RH and temperature; Surface Temperature)
Weight:	100g (3.53oz)	Logging Rate:	Logger interval adjustable between 5 minutes and 1 hour
Construction:	ABS enclosure	Transmission Range:	Up to 50m(165ft) line-of-sight
Power:	1 x AA type battery 1.5 Volt	Bluetooth:	BLE Bluetooth Low Energy 4.2 compliant, Bluetooth 5 advertising
Included:	Wall Mounting and Tripod Stand		

RELATIVE HUMIDITY SENSOR SPECIFICATIONS

Range:	0 to 100%RH
Accuracy:	±1.5%RH Range 0% to 80%RH ±2.0%RH Range 80% to 99%RH (@ 25°C (77°F))
Resolution:	0.1% over the complete range
Drift:	<0.25%RH per year

TEMPERATURE SENSOR SPECIFICATIONS:

Range:	-20°C to 70°C (-4°F to 158°F)
Accuracy:	±0.1 °C Range -20°C to 70°C (±0.1°F Range -4°F to 158°F)
Sensor Protection:	PTFE Film protects sensor opening from water & dust
Drift:	<0.03°C (0.04°F) per year

Free App Available for Mobile and Tablet:



SPECIFICATIONS

CONTACT TEMPERATURE PROBE MEASURING RANGE




The CTP Contact Temperature Probe is a plug-in accessory probe used with the FeedBack DataLoggers to measure and log surface temperature over time. Used alongside the Humidity sensor functions in the DataLogger, dew point circumstances can be easily identified.

Units:	°C (°F)	Temperature Range:	-30°C to +80°C (-20°F to +175°F)
Accuracy:	±0.5°C from -10°C to +85°C (±0.9°F from 14°F to 185°F)	Resolution:	0.1% over the complete range

KIT SPECIFICATIONS

Size:	33.5cm x 24cm x 8cm (13.2" x 9.5" x 3.2")	Weight:	1.3kg (2.8 lbs)
Power:	3 x AA batteries		

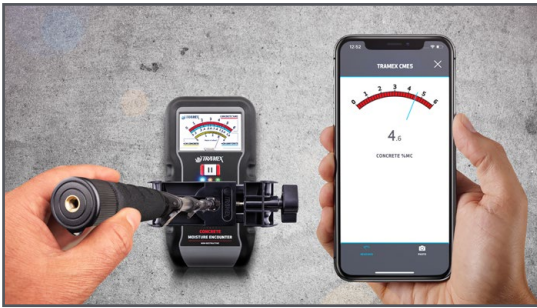

Distributed by:



Checkline Europe B.V.

Dennenweg 225 B
7545 WE Enschede
The Netherlands

Phone: +31538200245
Website: www.checkline.eu
Email: sales@checkline.eu

